

New Products

New SeaLife Cameras



ECOshot SL321

Cameras Underwater, the UK and Ireland's leading supplier of underwater photographic equipment, are pleased to announce the release of two new, long awaited cameras; the ReefMaster Mini and the ECOshot.

These new models compliment the existing range perfectly. The ReefMaster Mini is a rugged 6 mp digital camera designed with adventure in mind.

With a coating of rubber armour the ReefMaster will withstand being dropped from up to 2 meters. It is also waterproof down to 40m-enough for most divers. It has a large 2" LCD screen for easy shot composition and review, it also features fast start up and shutter response-so no more missed shots. The ReefMaster will



ReefMaster Mini SL320



ReefMaster Mini SL320 rear

accept SeaLife's new add-on wide angle lens enabling the user to get closer to the subject giving clearer shots and fitting more into the picture.

The ECOshot boasts the same specification as the ReefMaster Mini except it is waterproofed to 23m. This camera is ideally suited to yachting, surfing, snorkelling or any other camera-hazardous environment.

The ReefMaster Mini costs £199.99 inc. VAT and the ECOshot is £174.99 inc. VAT.

www.camerasunderwater.co.uk



Ikelite Sony HDR HC-5 housing

The Sony HDR HC-5 and housing are compact and easy to travel with. A complete housing and camera combination weighs approximately 4kg (9 pounds). Housing has a working depth of 60 meters (200 feet).

The housing with base and handles measures 27cm (11") width; 20cm (8") height; 20cm (8") length. Sony NP-FH50, FH60, FH70 and FH100 batteries are accommodated.

The housing port is threaded allowing the use of optional 67mm threaded wide-angle conversion lens available from Inon, Epoque, or the #6420 Ikelite lens.

The Base removes instantly with a unique toggle clamp for traveling or attaching of the optional Pro Video-Lite 3 battery pack. The handle assembly detaches from the

housing by removal of just two nuts for packing.


The camera's LCD monitor can be viewed from the rear of the housing, using the External Mirror featured on the side of the housing.

This housing includes (IRC) Image Reversing Circuitry. The circuit reverses (flips) the image and text on the LCD screen so that when the image is reflected in the External Mirror, it appears correct left-to-right.

Included UR/Pro Color Filter provides color correction in tropical blue water. An optional filter #6441.81 is also available to achieve more natural tones in green water settings.

www.ikelite.com

Ikelite iTTL Adapter for Nikon digital SLR cameras

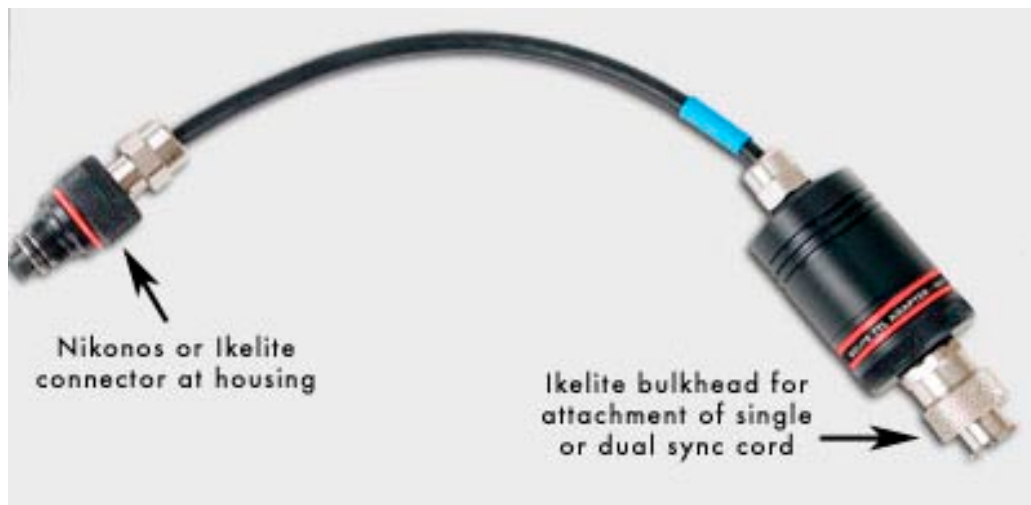

Ikelite's proven Nikon iTTL conversion circuitry is now available in a detachable adapter.


Take advantage of true Nikon TTL exposure to get perfect results every time. They use the same iTTL conversion circuitry proven effective in Ikelite housings for Nikon dSLR cameras and are compatible with many brands of underwater camera housings.

www.ikelite.com



How low can you go

Wherever you are, whatever the weather and whatever you're doing, we have the perfect solution for every situation. It's time to get wet.

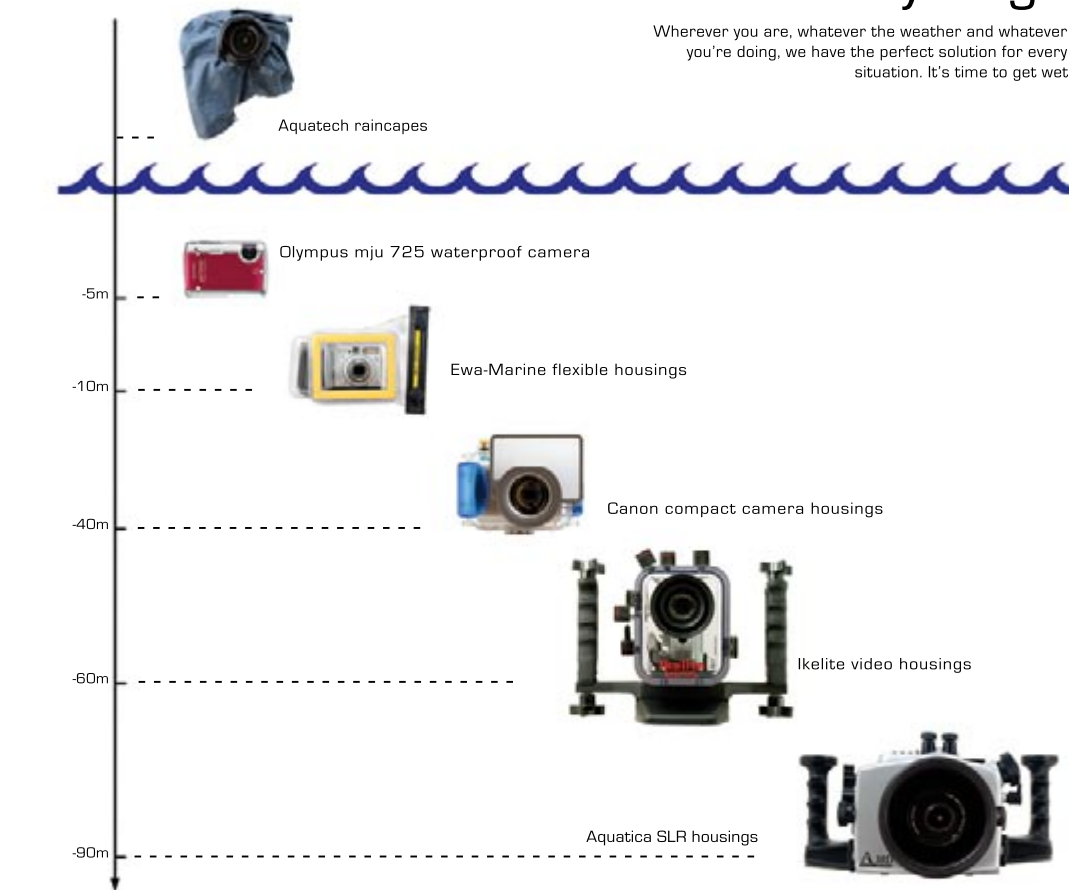

Specialist equipment for scuba diving, snorkelling, surfing, skiing, water sports, hiking and all wet and demanding conditions

**Cameras
UNDERWATER**

www.camerasunderwater.co.uk
Head Office and Mail Order: 01404-812277
London Showroom: 020-7839 1991
sales@camerasunderwater.co.uk

www.uwpmag.com

DIGIDEEP.com

the online directory for digital underwater-imaging equipment



Your online resource to more than

2.700 underwater imaging products - photo & video

5.200 enthusiastic underwater photographers

600 news, articles, reviews and travel reports

5.000 images in our weekly photo contest

...growing every month!



Lars Kirchhoff



Andreas Voelz



Derek Heasley

Join the
contest
and win
a digideep
shirt

<http://www.digideep.com>

Heinrichs Weikamp Mark II TTL housing

Heinrichs Weikamp will shortly have a housing for their Mark II TTL converters available.

Two strobes can be connected to it and it offers TTL with -3EV to +3EV correction, manual mode with selectable ratio between left and right strobe such as 1/3:2/3, 1/4:3/4 and 1/6:5/6. All these settings can be adjusted during the dive with control knobs. A display will also be integrated in the housing.

The housing can be used for all



our Mk. II converters. Hence Canon ETTL, Nikon iTTL, Olympus TTL as well as Sony-alpha and will be shipped with one of the converters installed.

www.heinrichsweikamp.com

www.heinrichsweikamp.com

info@heinrichsweikamp.com



Use your existing analog strobe
with your new digital camera!



The HeinrichsWeikamp Digital Adapter.

www.uwpmag.com

AQUATICA™ Digital

**Deep down,
you want Aquatica.**

**300 ft depth rating.
Sturdy aluminum construction.
Modular port system.
Dual strobe connectors.**

**Introducing our new
Aqua View Finder.**

Aquatica with Ikelite TTL adaptors



Aquatica is pleased to announce that coming soon, its housings will be available with Ikelite's time proven strobe connector. An agreement with Ikelite, the world renowned maker of fine underwater strobes, will now allow users of Aquatica housings to benefit from this rugged strobe connector and have access to the new Ikelite TTL adapter. The bulkhead and its hot shoe attachment are original parts supplied to us from the Indianapolis based manufacturer and are factory installed and tested by Aquatica.

www.aquatica.ca

Patima Nikon D80 housing



The Patima PDCH-D80 housing is machined from a solid block of aluminium and has a 100mm screw thread port fitting.

There is a 60mm flat and 160mm dome ports available as well as a 40mm extension ring. There is a choice of Patima sync sockets or Nikonos type.

The housing is rated to 120 metres with an operational depth of 80 metres. Without the handles it measures 189 x 171 x 144 and a complete macro set up weighs just under 4kg on land and is virtually neutral underwater.

www.patimahousing.com

Amphibico HD monitor



The Amphibico ACHDM043 16:9 HD 4.2" Color LCD monitor will be available in May; this HD monitor will highly compliment Phenom and EVO Pro users. It will facilitate fine focusing for macro shooting which is unforgiving in HD and requires the best possible resolution that only an HD monitor can give. We are now taking pre-orders, so do not wait as quality is limited on the first production run.

www.amphibico.com

usaNexus.com
858-481-0604



45 degree finder



D70



D200



1Ds MarkII



Fiber optic sync



D2x



D80



5D

New Ultralight buoyancy arms



If your current camera rig is quite heavy and results in wrist strain after a while Ultralight's new buoyancy arms might well be your saviour.

The new arms are 2" (50mm) in diameter and so displace more volume of water to provide positive buoyancy.

Because the arms have an increased diameter an optional new style clamp (AC-CSL) is needed if you want to fold the arms so that they are side by side.

The amount of buoyancy depends on the configuration you have but, for example, with a two arm set up including base adaptor, 3 clamps and a strobe adaptor, with two 8" lengths the buoyancy is neutral. Increase the length to two 12" lengths and suddenly you have 11.2oz (0.3kg) of lift. Go to the longest length of two

The new arms (top) are 2" (50mm) in diameter

The new style clamp (AC-CSL) is on the right



16" and you will get an amazing 11lb 9oz (0.7kg) of lift!

www.ulcs.com

www.uwpmag.com

ULTRALIGHT

CONTROL SYSTEMS



TRAYS, PIVOTS, AND ARMS FOR CAMERAS,
HOUSINGS, STROBES, AND LIGHTS

For the smallest point and shoot to the largest video housing on the market.

Your quest for the best arm system is over.
Once you have an Ultralight arm
you will never need to upgrade.

The original arm with o-rings in the balls allowing
for smooth clamping and adjustment of your arms.
Accept no imitations.



Visit our website: www.ulcs.com for product info
& to locate a dealer near you. Unable to find a dealer?
E-mail: info@ulcs.com